

EROSION & SEDIMENT CONTROL NOTES:

THE FOLLOWING SEQUENCE OF CONSTRUCTION SHALL BE ADHERED TO BY THE CONTRACTOR AT ALL TIMES:

- OBTAIN ALL PERMITS AND POST ALL REQUIRED BONDS.
- CONTRACTOR SHALL KEEP & MAINTAIN A COPY OF THE VIRGINIA EROSION & SEDIMENT CONTROL HANDBOOK, LATEST EDITION ON-SITE AT ALL TIMES.
- INSTALL PERIMETER SILT FENCE AND TEMPORARY GRAVEL CONSTRUCTION ENTRANCE/EXIT. TEMPORARY EROSION CONTROL MEASURES MUST BE INSTALLED PRIOR TO ALL LAND DISTURBING ACTIVITIES.
- ALL SPECIFIC LOCATIONS FOR SILT FENCE OR STONE CHECK DAMS ARE NOT SHOWN ON THE APPROVED PLANS. THE NEED FOR ADDITIONAL E&S CONTROL MEASURES IS TO BE DETERMINED IN THE FIELD BY THE PROJECT ENGINEER AND THE EROSION CONTROL DIRECTOR.
- INSTALL BLANKET MATTING AND RIP-RAP IN DITCHES AND ON STEEP SLOPES PER DETAILS.
- TEMPORARY SEEDING SHALL OCCUR AS CONSTRUCTION PROGRESSES. NO SECTION OF DISTURBANCE LONGER THAN 1000' SHALL BE LEFT UNSEEDED. TEMPORARY SEEDING SHALL COMPLY W/ DEQ.
- REMOVE EROSION AND SEDIMENT CONTROL MEASURES UPON SITE STABILIZATION.
- CONTRACTOR IS RESPONSIBLE FOR ALL MAINTENANCE MEASURES UNTIL THE SITE IS STABILIZED.
- ALL DENUDED AREAS SHALL BE SHAPED TO PROMOTE POSITIVE DRAINAGE.

GRADING NOTES:

- CONTRACTOR SHALL COORDINATE WORK WITH OTHER CONTRACTOR(S) ON-SITE.
- ALL SPOT ELEVATIONS REFLECT FINISHED ELEVATIONS. SUBGRADE ELEVATIONS SHALL BE DETERMINED FROM INDIVIDUAL SECTION DETAILS.
- CONTRACTOR SHALL PROTECT THE PUBLIC AT ALL COST FROM CONSTRUCTION ACTIVITIES WITH FENCES, BARRICADES, ENCLOSURES, AND OTHER BEST MANAGEMENT PRACTICES.
- CONTRACTOR TO VERIFY LOCATION OF ALL UNDERGROUND UTILITIES BEFORE SITE WORK MAY BEGIN. CONTRACTOR IS RESPONSIBLE FOR REPLACING ANY DAMAGED UTILITIES.
- CONTRACTOR SHALL REPAIR ANY AND ALL AREAS DAMAGED BY SITE WORK AND TRANSPORTATION.

NOTE: ACCORDING TO DOCUMENTS OBTAINED FROM FEMA, THIS PROJECT IS A RESTORATION OF PRE-DISASTER CONDITIONS. NO UPGRADES ARE INCLUDED IN THE SITE DESIGN.

NOTE: CONTRACTOR SHALL FIELD VERIFY ELEVATIONS AND TIE OUT TO MATCH EXISTING.

VDOT STD. TYPE I WINGWALL
INV. = 535.00'


REMOVE EXISTING STONE HEADWALL AND CULVERT
REPLACE WITH BOX CULVERT AND WINGWALL.

VDOT STD. SINGLE BOX CULVERT
8' SPAN X 6' HEIGHT
111' @ 0.9%
(SEE DETAILS)

EXISTING RAIL TRACKS
TO BE REMOVED
FOR CONSTRUCTION BUT
TO BE REINSTALLED
AFTER STABILIZATION
AT EXISTING LOCATION
AND ELEVATION

REMOVE EXISTING STONE HEADWALL AND CULVERT AND REPLACE WITH BOX CULVERT AND WINGWALL.

VDOT STD. TYPE I WINGWALL
INV. = 534.00'

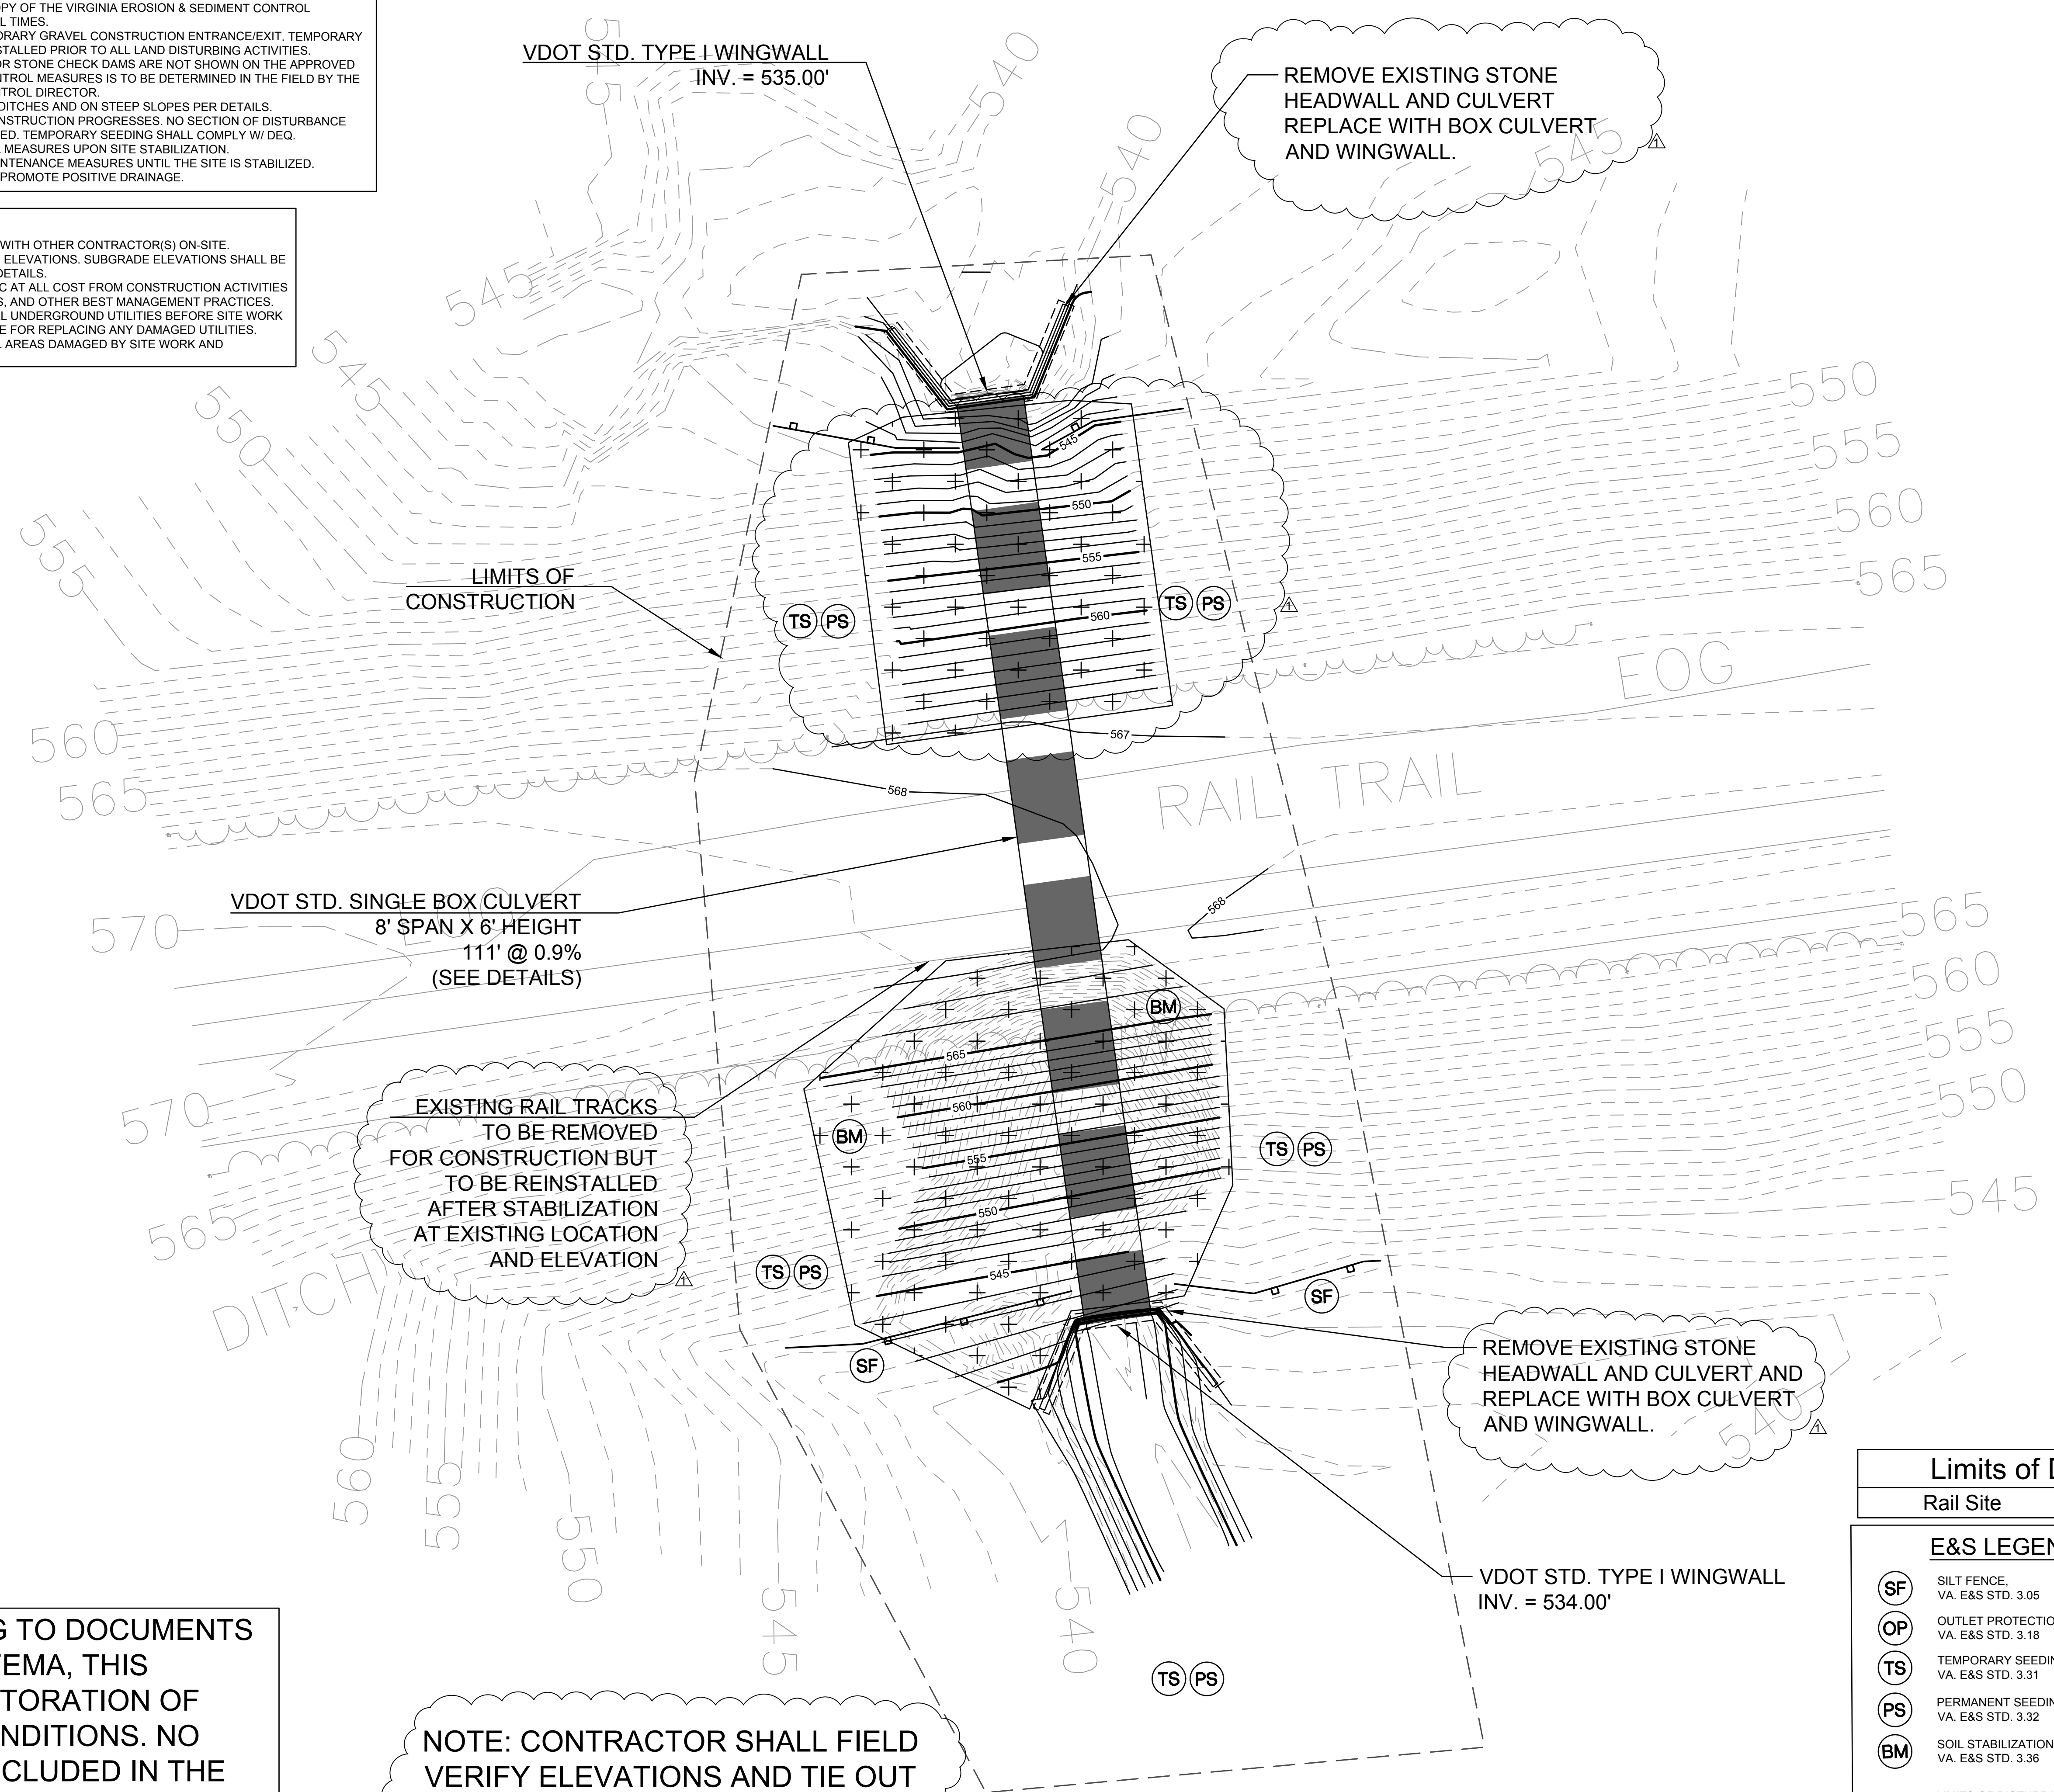


Limits of Disturbance	
Rail Site	0.28 AC
E&S LEGEND	
(SF)	SILT FENCE, VA. E&S STD. 3.05
(OP)	OUTLET PROTECTION, VA. E&S STD. 3.18
(TS)	TEMPORARY SEEDING, VA. E&S STD. 3.31
(PS)	PERMANENT SEEDING, VA. E&S STD. 3.32
(BM)	SOIL STABILIZATION BLANKETS AND MATTING, VA. E&S STD. 3.36
---	LIMITS OF DISTURBANCE
TOTAL LAND DISTURBANCE = 0.28 ACRES	




Dewberry Engineers Inc.
551 Piney Forest Road
Danville, VA 24540
Phone: 434.797.4497
Fax: 434.797.4341

RINGGOLD RAIL RESTORATION

PITTSYLVANIA COUNTY
RINGGOLD, VIRGINIA 24586

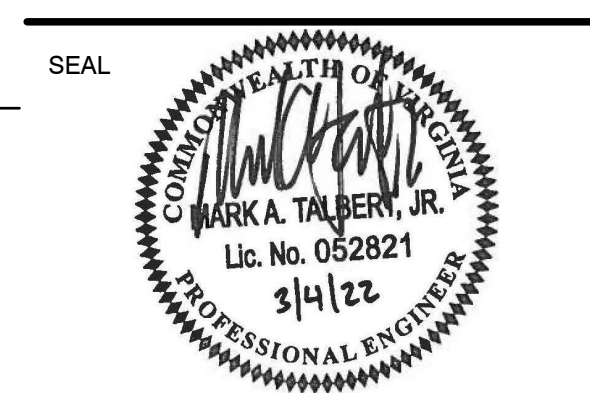

KEY PLAN

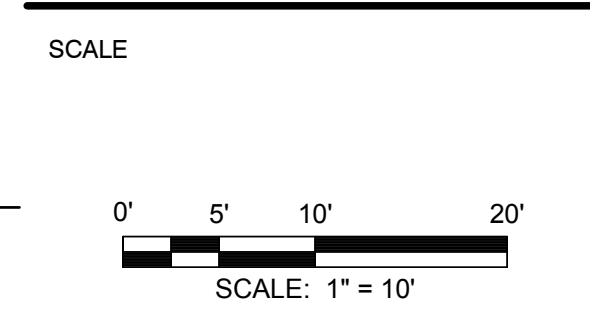

No.	DATE	BY	Description
3	3/4/22	JSS	ADDENDUM 3
2	3/1/22	JSS	ADDENDUM 2
1		JSS	MISC. REVISIONS

DRAWN BY: JDE/JSS
APPROVED BY: MAT
CHECKED BY:
DATE: 08/26/2021
TITLE:

RAIL SITE CONSTRUCTION PLAN

PROJECT NO. 50106038

C100

SHEET NO.